

PRODUKTINFORMATIONEN

Product Specifications

| January 2020



The XDETECT® Palm Rigid Scraper

The stainless steel rigid palm scraper feature XDETECT® detectable handles and 304 grade stainless steel blades. BST XDETECT® is a polypropylene based thermoplastic polymer compound, that is electromagnetically detectable. The native properties of polypropylene mean that the compound is strong and offers good resistance to many chemical solvents, acids and bases, when compared to other plastics.

The food safe stainless steel blade will not rust and can also be detected by metal detection systems. This scraper is suitable for a variety of food contact applications, particularly in the baking industry.

- Product Advantages:**
- ✓ Can be detected by in-line metal detection systems
 - ✓ Can be used to form part of HACCP and BRC procedures
 - ✓ Shows "All Due Diligence" in the prevention of foreign body contamination
 - ✓ Can be used in a variety of food contact applications

Product Code:	8900235-B
Product Colour:	Blue
Product Dimensions:	150mm x 125mm
Pack Size:	Pack of 10

PRODUKTINFORMATIONEN

Food Contact Status (EU)

Hereby we declare that the material XDETECT 2.0 in various colours is manufactured in line with the relevant requirements of 2023/2006/EC on good manufacturing practice (GMP) for materials and articles intended to come into contact with food.

The raw materials used in the manufacturing process of the above mentioned materials (XDETECT 2.0 in various colours) can be considered suitable for food contact applications in terms of compliance with European regulations. The raw materials used meet the relevant requirements of EU Framework Regulation 1935/2004 on materials and articles intended to come into contact with food.

All monomers, starting substances and additives used to manufacture these grades are listed in Commission Regulation (EU) No. 10 (2011) on plastic materials and articles intended to come into contact with food. Applicable restrictions on monomers, additives etc. (SML, QM) are available on request. The finished articles are required to meet the Overall Migration Limit (OML) of 10 mg/dm(sq) or 60 mg/kg food.

Colourants used are compliant with European Council Resolution AP(89) 1 on the use of colourants in plastic materials coming into contact with food.

BST Detectable Products hereby declare that articles manufactured from BST XDETECT are, according to EU regulations, authorised to come into direct contact with all types of foodstuffs at a maximum temperature of 40°C for a maximum time period of one hour.

Food Contact Status (FDA)

The polypropylene base resin used in XDETECT 2.0 meets the FDA (Food and Drug Administration) requirements contained in the Code of Federal Regulations – latest revision (1/4-2011) - in 21 CFR 177.1520 (a) (3) (i) , (b) and (c) (3.1a).

At the same time this base resin grade meets the FDA criteria in 21 CFR 177.1520 for food contact applications, excluding cooking, listed under conditions of use C through H in 21 CFR 176.170 (c), Table 2., and can be used in contact with all food types as listed in 21 CFR 176.170 (c), Table 1. Also the mineral additives and the pigments used are GRAS (Generally Recognized As Safe) or are FDA cleared under specific FDA citations.

Metal Detectability (FOR GUIDANCE ONLY)

XDETECT is an electromagnetically detectable and x-ray visible plastic compound. The metal detectability of this compound will vary based on, but not limited to the following factors:

- Detector Calibration Levels
- Food Product Type / Effect (E.g. Wet, Dry, Frozen, Liquid)
- Detector Aperture Dimensions
- Contaminant Orientation

For this reason Niebling recommend that all our products be thoroughly tested on your metal detection systems by a trained and certified professional. It may be the case that your equipment needs to be recalibrated in order to reliably detect this product. Such a professional should be available by contacting the manufacturer of your metal detection system. XDETECT samples gave following test piece equivalent readings when tested through the geometric centre of an Anritsu KD8124AW coaxial metal detection system with a 95 x 450 mm aperture:

PRODUKTINFORMATIONEN


XDETECT Contaminant Size	Advised Minimum Ferrous Sensitivity for Detection
4.0 mm ³ Cube	2.0 mm FE
6.0 mm ³ Cube	2.5 mm FE
7.0 mm Ø Sphere	2.5 mm FE
8.0 mm ³ Cube	3.5 mm FE
11.0 mm Ø Sphere	4.0 mm FE

Although designed to be detected as a ferrous contaminant, XDETECT will also trigger smaller readings as a non-ferrous and stainless steel contaminant. Please note that the above information is for guidance only, and performance will vary.

X-Ray Visibility (FOR GUIDANCE ONLY)

In contrast to metal detection, x-ray visibility is determined by material density. For this reason, XDETECT contains an additional, evenly dispersed, food safe, high density additive.

Based on our experience and testing, positive readings should be consistent for XDETECT fragments as small as 5mm³. X-ray detection performance will be reduced when small fragments are buried in deeper, denser products. **Detection will depend on product type and density.** This screenshot shows a 5mm³ XDETECT fragment through a popular x-ray inspection system, inside a packaged garlic bread product.

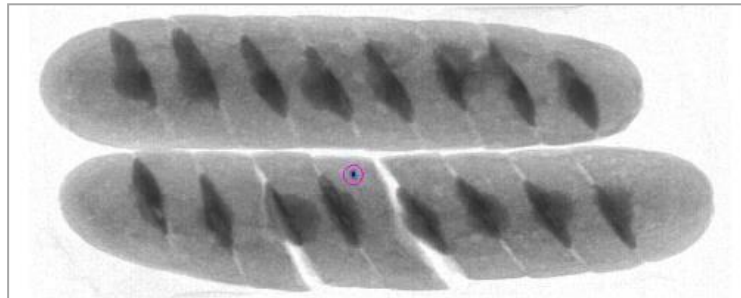

We highly recommend that all our products be thoroughly tested on your x-ray inspection systems by a trained and certified professional. It may be the case that your equipment needs to be recalibrated in order to reliably detect this product. Such a professional should be available by contacting the manufacturer of your x-ray inspection system.

DISCLAIMER

The information provided in this product specification sheet is based on our experience and knowledge to date and we believe it to be true and reliable. This information is intended as a guide for your use of our products, the use of which is entirely at your own discretion and risk. We, Niebling Technische Bürsten GmbH, cannot guarantee favourable results and assume no liability in connection with the use of our products.